




HIGH MOUNTED STOP LIGHT ASSEMBLY

COMPONENTS

BACK DOOR CENTER GARNISH

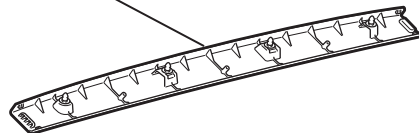

CENTER STOP LIGHT ASSEMBLY

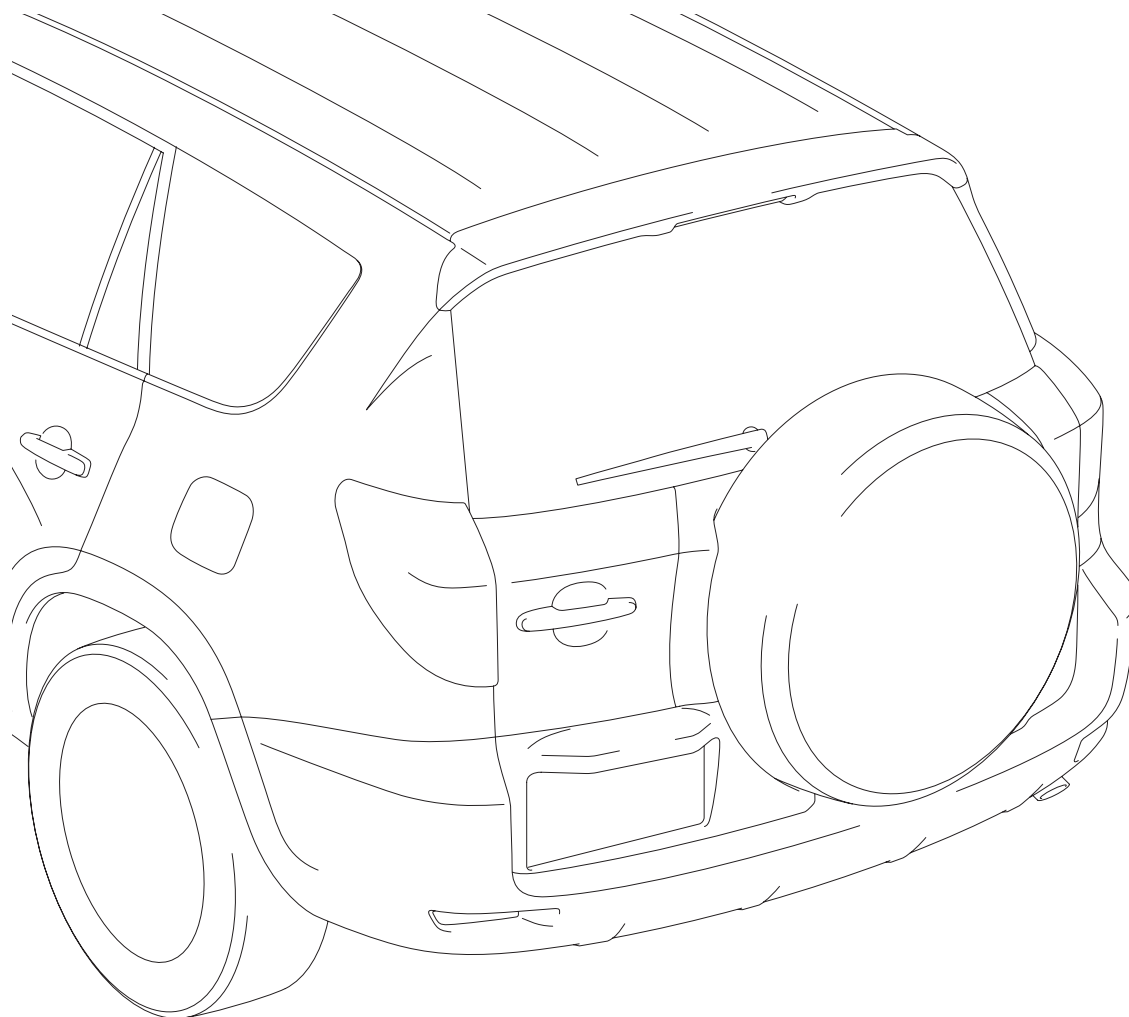



REMOVAL

1. **DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL**

CAUTION:

Wait at least 90 seconds after disconnecting the cable from the negative (-) battery terminal to prevent airbag and seat belt pretensioner activation.

2. **REMOVE BACK DOOR CENTER GARNISH** (See page [ED-59](#))
3. **REMOVE CENTER STOP LIGHT ASSEMBLY**
 - (a) Disconnect the connector.
 - (b) Remove the 2 screws and center stop light.

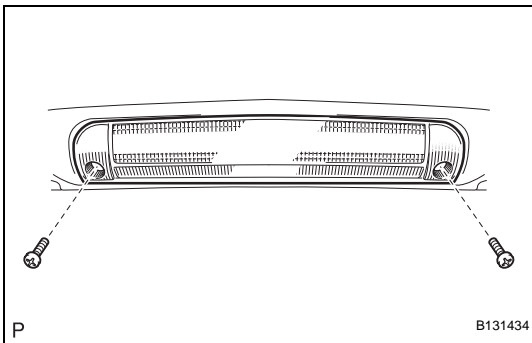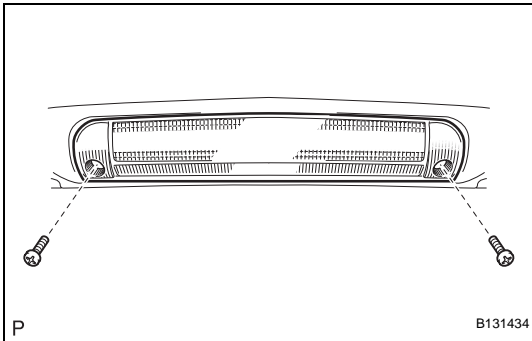

INSTALLATION

1. **INSTALL CENTER STOP LIGHT ASSEMBLY**
 - (a) Install the center stop light with the 2 screws.
 - (b) Connect the connector.
2. **INSTALL BACK DOOR CENTER GARNISH** (See page [ED-67](#))
3. **CONNECT CABLE TO NEGATIVE BATTERY TERMINAL**